

NJP FLOOR LAMP

Designed by nendo

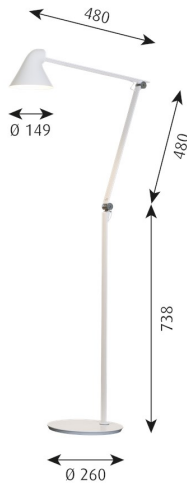

Technical specifications

Materials

Base: Steel. Arms and lamp head: Aluminium. Joints: Anodised Aluminium. Stem: Aluminium.

Finishes

White, Black or Light Aluminium Grey, powder coated.

Mounting

1.7 m. Cord with plug.

Switch: On the fixture head.

Timer function: 4 hours or 8 hours.

LED driver: separate, plugs into power outlet.

The light has two built-in intensities. For mounting instructions, see download section on the product detail page.

Information


Driver fitted externally on cord. The light has two built-in intensities. The weight includes the base plate. This product is fitted with an integrated energy-saving LED light source. Should you wish to replace it, please contact Louis Poulsen so we can help you purchase the correct LED Replacement Kit. Please note that LED-replacement should always be carried out by an authorised electrician. For the E-socket product variants, bulbs are not included. LED light source is part of the product.

NJP FLOOR LAMP


Designed by nendo

Light distribution diagrams





CARTESIAN

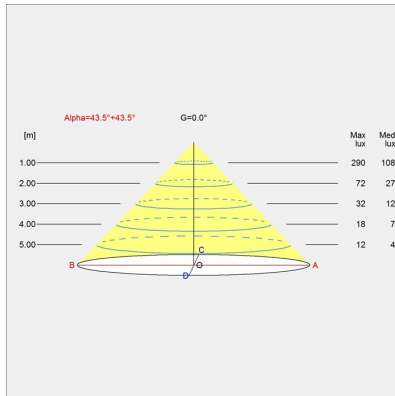

ISOLUX

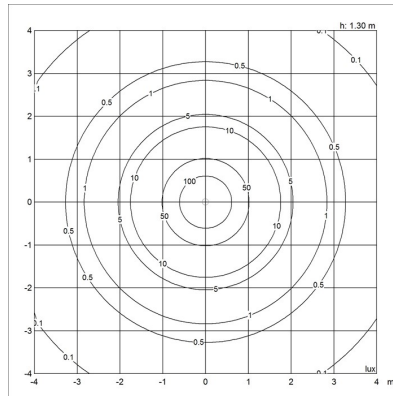

POLAR

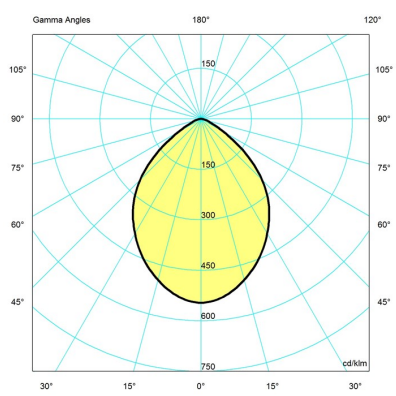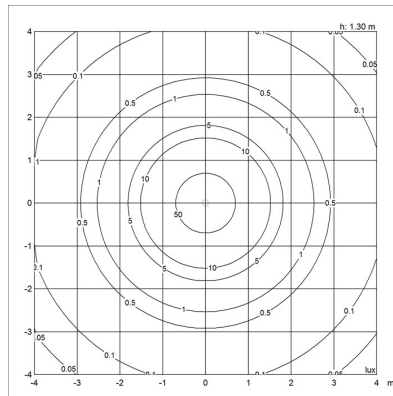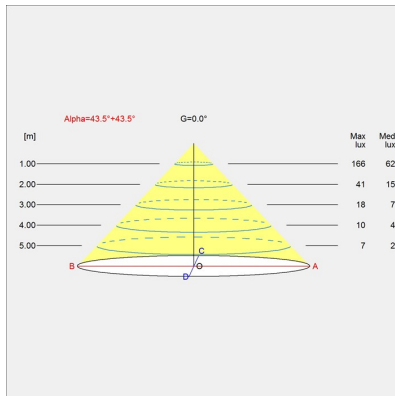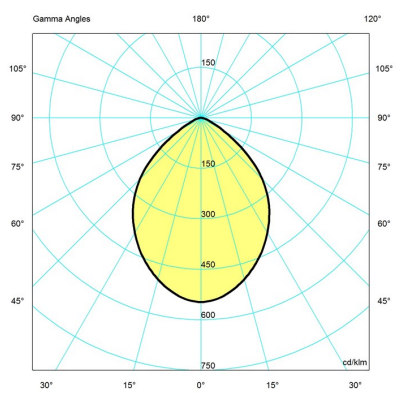

Variant Options

For particular variant options, please check our online Product Variants Configurator on the product detail page.

VARIANT NO.	LIGHT SOURCE	VOLTAGE/FRQ	LUMEN	FEATURES	CABLE
5744162380	LED 2700K 10W		529	-	Black cord
5744165138	LED 2700K 10W		529	-	Black cord
5744165141	LED 2700K 10W		529	-	White cord
5744165154	LED 3000K 10W		550	-	Black cord
5744165167	LED 3000K 10W		550	-	White cord
5744165921	LED 3000K 10W		550	-	Black cord

NJP FLOOR LAMP

Designed by nendo

Variants

VARIANT NUMBER	COLOR, RAL	W / H / L (IN) / W (LB)
5744162380	LIGHT ALU GREY, T06	260 / 1250 / 560 IN / 7.1 LB
5744165138	BLK, 617	260 / 1250 / 560 IN / 7.1 LB
5744165141	WHT, 011	260 / 1250 / 560 IN / 7.1 LB
5744165154	BLK, 617	260 / 1250 / 560 IN / 7.1 LB
5744165167	WHT, 011	260 / 1250 / 560 IN / 7.1 LB
5744165921	LIGHT ALU GREY, T06	260 / 1250 / 560 IN / 7.1 LB