
PANTHELLA 400 TABLE LAMP

Designed by Verner Panton



Technical specifications

Materials

Shade: Injection moulded white opal acrylic. Base: White, injection moulded ABS. Housing: White, injection moulded ABS. Stem: White, steel. Diffuser : Injection moulded opal pmma.

Finishes

White opal acrylic.

Mounting

Cable type: Plastic cord with plug. Cable length: 2.5m. Light control: On/off switch on cord. Diffuser with bajonet lock. For mounting instructions, see download section on the product detail page.

SPECIFICATION NOTES


The innovation of light sources is ongoing. Consequently we only inform about the max. wattages. On www.louispoulsen.com we update a list of recommendable light sources.

PANTHELLA 400 TABLE LAMP


Designed by Verner Panton

Light distribution diagrams


CARTESIAN

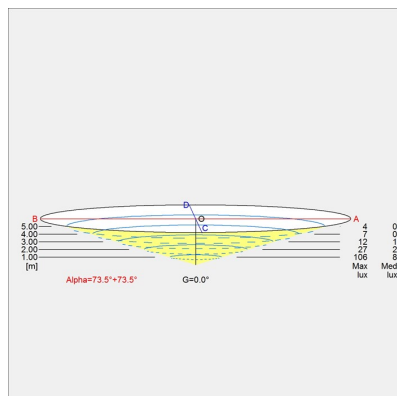

ISOLUX

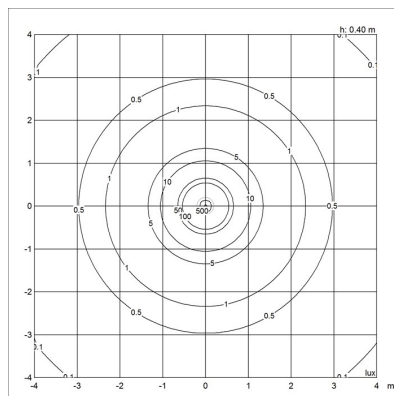

POLAR

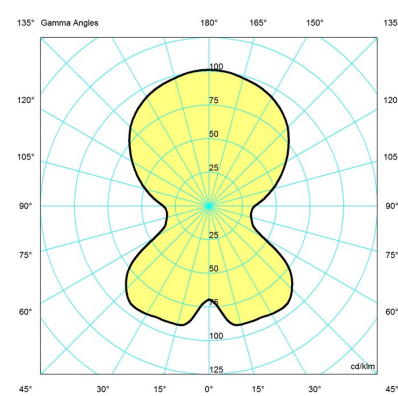

Variant Options

For particular variant options, please check our online Product Variants Configurator on the product detail page.

VARIANT NO.	LIGHT SOURCE	VOLTAGE/FRQ	LUMEN	FEATURES	CABLE
5744167042	1x28W E27		825	-	With cord
5744167055	1x28W E27		825	-	With cord

Variants

VARIANT NUMBER	COLOR, RAL	W / H / L (IN) / W (LB)
5744167042	WHT OPAL ACRYL, 970	400 / 550 / 400 IN / 2.5 LB
5744167055	WHT OPAL ACRYL, 970	400 / 550 / 400 IN / 2.6 LB